

CBS. Nos. 2 & 3 SYSTEMS

SHARED SERVICE (MANUAL)

SUBSCRIBER'S EXTENSION PLAN IB (INTERNAL ONLY)

USING TELEPHONES No. 706 C.B.

N4623
4 PANELS-I
21-9-60

CIRCUITATION	CBS. 2,3 & MAGNETO
Suffix	8 2 63 A
NOTES: AMENDED TO SHOW SUPERSESSION ALL PANELS MADE YELLOW	
EASER	Y

NOTES

1. THE FACILITIES OF PLAN IB. ARE SHOWN ON DGM. NI436.
PLAN IA. SHOULD BE PROVIDED FOR NEW WORK.

2. APPARATUS REQUIRED:-

MAIN:


TELEPHONE No.706 CB
ADAPTER LOCAL-BATTERY No.1
BOX BATTERY No.3
2 OR 3 CELLS, DRY R40.
(SEE E.I. TELEPHONES STNS. A 3205)
CORD INST., No.6/44AA...
BLOCK TERMINAL No.20/8

EXTENSION:

TELEPHONE No.706 CB
ADAPTER LOCAL-BATTERY No.1
BOX BATTERY No.3
2 OR 3 CELLS, DRY R40.
(SEE E.I. TELEPHONES STNS. A 3205)
CORD INST., No.5/37AA...

3. TRANSFER WHITE CONDUCTOR OF HANDSET CORD FROM T10 TO T11.
4. RECOVER CORDS, INST FROM TELES., AND FIT CORD, INST. No. 6/44AA... AT MAIN AND No.5/37AA ...
AT EXTN.
5. REARRANGE STRAPS OF TELES. AND BLOCK TERMINALS AS SHOWN
6. REVERSE REGULATORS IN TELES. TO SHORT CIRCUIT JACK POINTS B,C&D
7. WHEN EXTN. BELL IS REQD. CONNECT IN PLACE OF STRAP BT3-7 AT MAIN
8. THE EXCH. LINE MAY BE CONNECTED AT INTERMEDIATE OR LAST EXTNS. IF MORE CONVENIENT

LAST

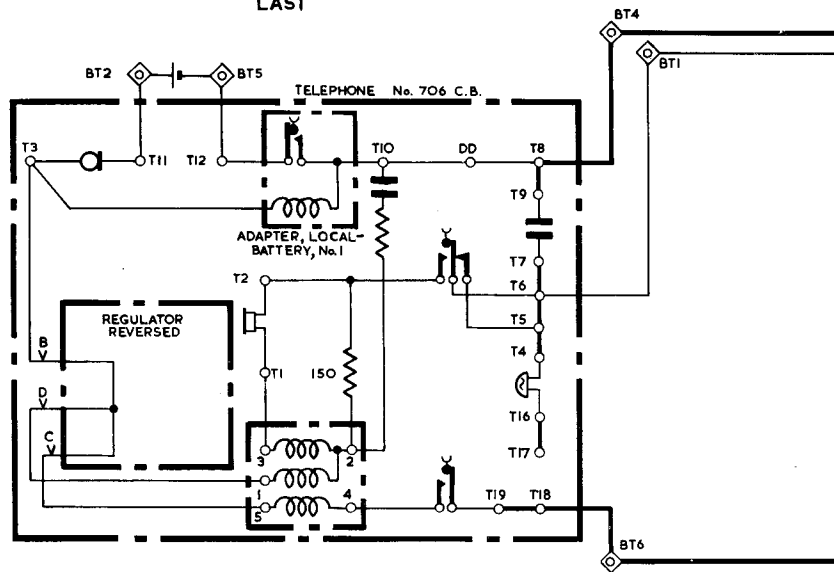

C.B.S. Nos. 2 AND 3 SYSTEMS
 SHARED SERVICE (MANUAL)
 SUBSCRIBERS EXTENSION PLAN 1B (INTERNAL ONLY)
 USING TELEPHONES No. 706 C.B.

N4623
 4 PANELS-3
 21-9-60

CIRCULATION
 C.B.S. 2 & 3
 & MAGNETO

Suffix

8.2.63 A


NOTET: AMENDED TO SHOW SUPERSESSION
 ALL PANELS MADE YELLOW.

Amend

Y

INTERMEDIATE

MAIN

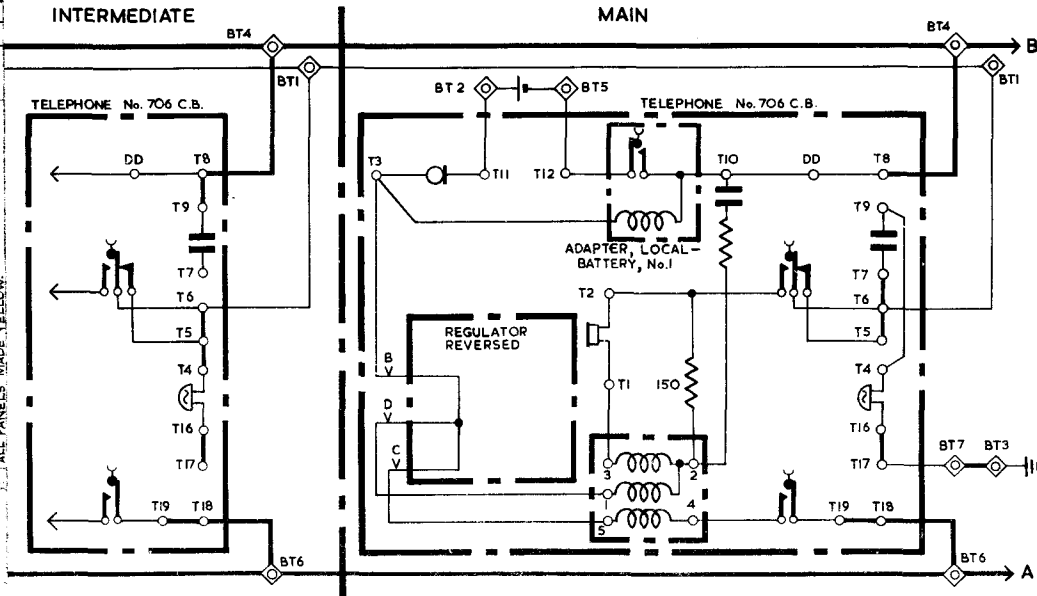

N4623
4 PANELS-4

WIRING

LAST

INTERMEDIATE

MAIN

